

XLERATOR® HAND DRYER

SPECIFICATIONS



Model XL-BW
Surface-mounted, Automatic,
White Thermoset (BMC) Cover



Model XL-W
Surface-mounted, Automatic,
White Epoxy Painted Cover



Model XL-GR
Surface-mounted, Automatic,
Graphite Textured Painted Cover



Model XL-C
Surface-mounted, Automatic,
Chrome Plated Cover



Model XL-SB
Surface-mounted, Automatic,
Brushed Stainless Steel Cover


Note: Custom Colors Available (visit our web site for more information)

Suggested Mounting Heights From floor to Bottom of Dryer

	Hand Dryers
Mens'	45" (114 cm)
Ladies'	43" (109 cm)
Teenagers'	41" (104 cm)
Sm. Children	35" (89 cm)
Handicapped	37" (94 cm)

Units are Available as Specified in:


110/120V	12.5 Amp	60 Hz
208V	7.0 Amp	60 Hz
220/240	6.5 Amp	60 Hz
277V	5.5 Amp	60 Hz
220/240V	6.5 Amp	50 Hz

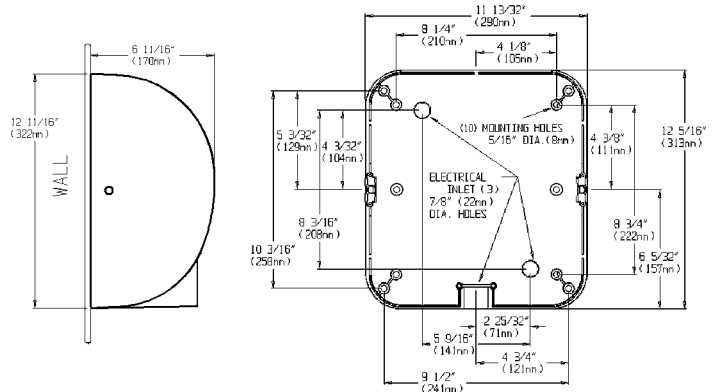

Dimensions: 11 3/4" lg. X 12 11/16" high x 6 11/16" deep
(298 mm lg. X 322 mm high x 170 mm deep)

Weight: XL-BW - 13 lbs. (5.91 kgs.) XL-SB 14 lbs. (6.36 kgs.)
XL-W, XL-GR, XL-C - 16 lbs. (7.3 kgs.)

ADA Compliant Recess Kit

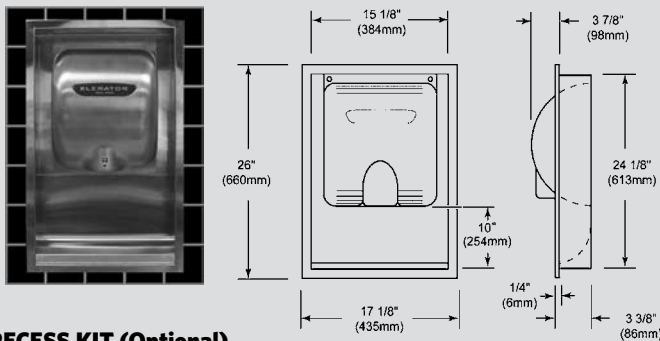

RECESS KIT (Optional)

Dimensions: 17 1/8" wide x 26" high x 3 3/8" deep
(435 mm wide x 660 mm high x 86 mm deep)
Weight: 13 lbs (5.9 Kg)

XLERATOR® HAND DRYER

CONSTRUCTION

A. Cover shall be one of the following: **Die-cast zinc alloy** - One-piece, heavy-duty, rib-reinforced, lightweight, unbreakable, rustproof and all exposed surfaces shall be bright chrome plated or finished with chip-proof, electrostatically applied epoxy paint. **White thermoset (BMC)** - Fiberglass re-enforced bulk molding compound. **Stainless Steel** - with a brushed finish. All covers will be fastened to a wall plate by two chrome plated tamper-proof bolts.

B. Wall plate shall be equipped with (3) 7/8" (22 mm) diameter holes, one of which shall be suitable for use with surface conduit, for ease of wiring.

C. All internal parts shall be coated according to Underwriters' Laboratories, Inc. requirements.

D. Entire mechanism shall be internally grounded.

E. Optional RECESS KIT includes a wall box fabricated of 22 GA 18-8 type 304 stainless steel with #4 satin finish and a 16 GA 18-8 type 304 stainless steel dryer mounting plate. All welded construction. A stainless steel cable is connected to the dryer mounting plate to hold the dryer in position when servicing.



See us in Sweet's
CD Online Catalog Files



Printed on recycled paper
Printed in the U.S.A.



EXCEL DRYER Inc.

357 Chestnut Street • P.O. Box 365
East Longmeadow, MA 01028 U.S.A.
Tel: (413) 525-4531, Fax: (413) 525-2853
Email: sales@exceldryer.com
www.exceldryer.com

